


SELECTING PROPANE

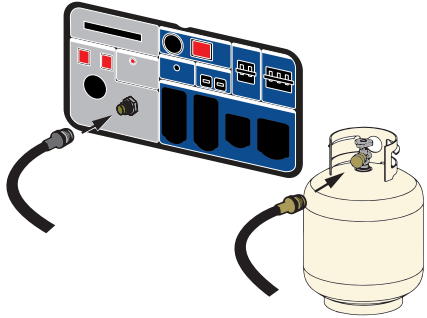


Step 1: Connect the included propane valve to the generator and to the propane tank. Open valve on propane tank.

FUEL CHOICE

GAS


LPG



Step 2: Flip the FUEL CHOICE switch to LPG.

OR

SELECTING GASOLINE

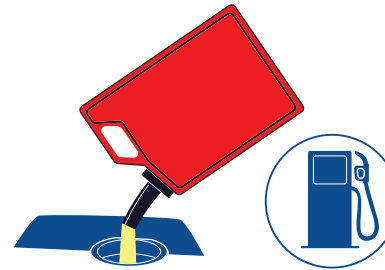


Step 1: Check the generator for gasoline. Add as needed.

FUEL CHOICE

GAS


LPG



Step 2: Flip the FUEL CHOICE switch to GAS.

CONTINUE STARTUP STEPS WITH EITHER FUEL

Step 3: Flip main breaker OFF.




Step 4: Flip the LOW IDLE switch to OFF.

LOW IDLE

ON

OFF




Step 5: Flip the START UP switch to ON.

START UP


ON

OFF




Step 6: Turn fuel switch counter clockwise to ON.

FUEL OFF (STORE)



FUEL ON (RUN)

Step 7: Press START BUTTON and hold until green.



Step 8: Flip main breaker ON and plug in devices.

